

BASKETBALL

BB-15 SWING FORWARD CEILING SUSPENDED

BB-15RG (For rectangular glass backboard)

Typical use is in front of stages, over bleachers, in front of mezzanines or windows where walls will not support or wall space does not allow wall mounted units.

Installed in gymnasiums to a ceiling height up to 30' 0" (9144 mm). Used in all cases where ceiling exists. Constructed from 2" (50 mm) square X .125 (3mm) wall tubing.

Standard paint colour is **black**. See page 3 for paint colour chart. Custom colours available upon request.



An electric winches at an additional cost is required if a glass backboard is used.

Complete the configuration of your basketball unit by choosing and ordering separately from the following options.

Backboard (page 14-15), **Goal** (page 16-17), **Winch** (page 12-13), **Posilok Safety Strap** (page 18) and **Safety Sign** (page 13).

Call for Prices

DRAWING OF UNIT

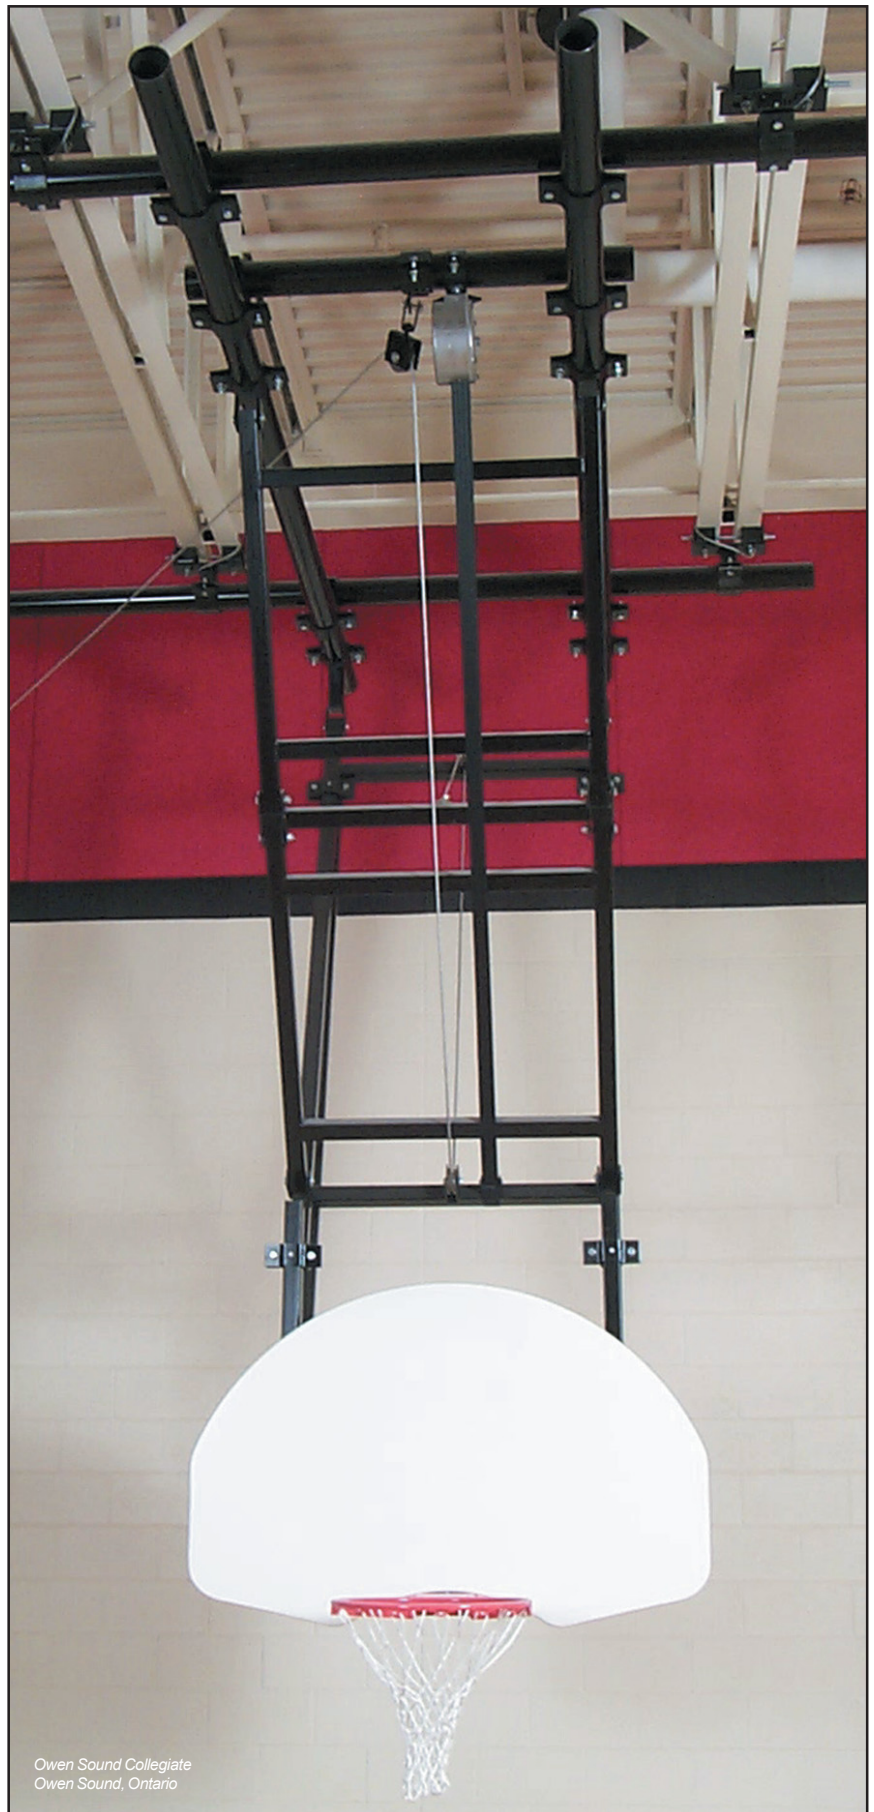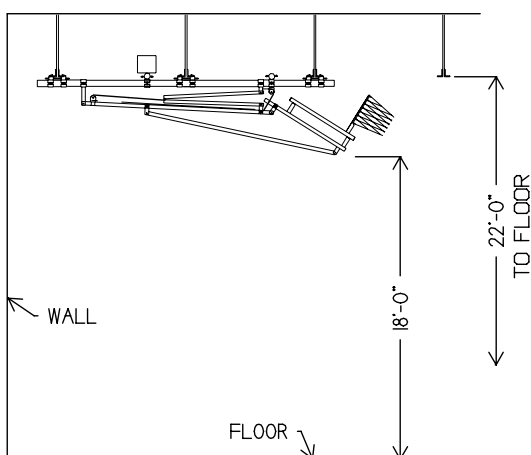

Owen Sound Collegiate
Owen Sound, Ontario